




EB 578D



FAAC

Via Benini, 1
40069 Zola Predosa (BO) - ITALIA
Tel. 0039.051.61724 - Fax. 0039.051.758518
www.faacgroup.com

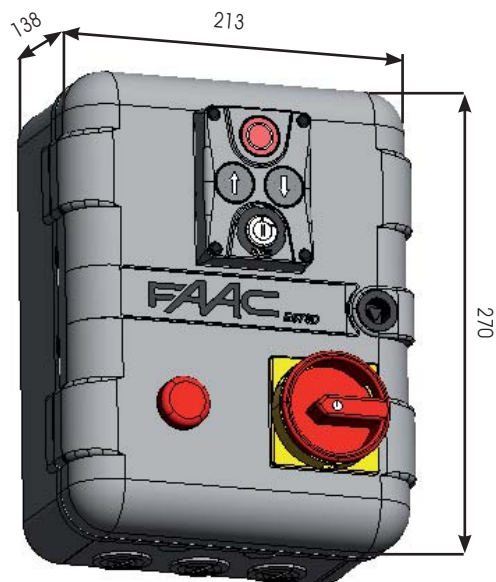

- GB -	EB 578D
Operating voltage V ~ (+6%- 10%)	230 V
Protection class	IP 54
Operating ambient temperature	-20/+55 °C
Installation	Wall


- F -	EB 578D
Tension d'utilisation V ~ (+6%- 10%)	230 V
Indice de protection	IP 54
Température d'utilisation	-20/+55 °C
Installation	Au mur

- D -	EB 578D
Betriebsspannung V ~ (+6%- 10%)	230 V
Schutzart	IP 54
Temperatur am Aufstellungsort	-20/+55 °C
Installation	Wand



- E -	EB 578D
Tensión de utilización V ~ (+6%- 10%)	230 V
Grado de protección	IP 54
Temperatura ambiente de funcionamiento	-20/+55 °C
Instalación	En pared

- NL -	EB 578D
Gebruiksspanning V ~ (+6%- 10%)	230 V
Beschermingsgraad	IP 54
Omgevingstemperatuur	-20/+55 °C
Installatie	Wand

- I -	EB 578D
Tensione di utilizzo V ~ (+6%- 10%)	230 V
Grado di protezione	IP 54
Temperatura ambiente	-20/+55 °C
Installazione	A parete

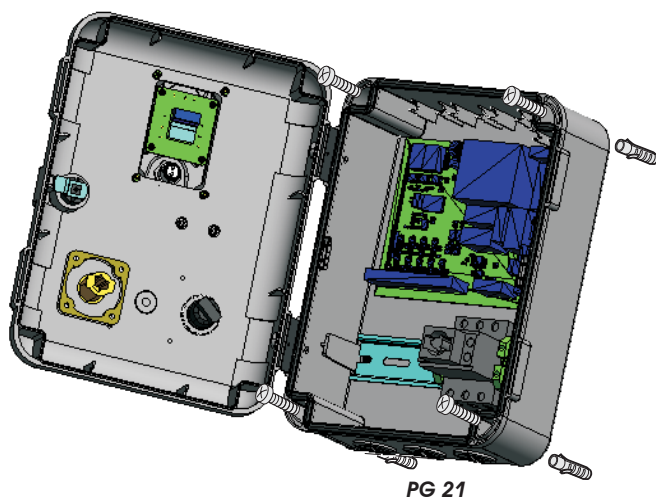

PG 21

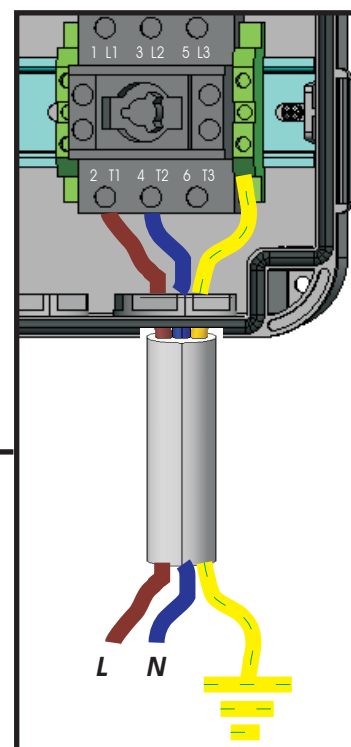

-
- Diagram illustrating the control panel layout with labels:
- STOP *** (Red circular button)
 - OPEN (A) *** (Upward arrow button)
 - CLOSED* / OPEN (B) *** (Downward arrow button)
 - STOP** (Red circular button, bottom)
- Legend:
- TASTIERA
 - KEYBOARD
 - CLAVIER
 - TASTATUR

- 

- 

-